



WARNING: The splashback must be installed on a flat, level surface. If the splashback is not installed correctly, it may become loose and cause injury.

WARNING: The splashback must be installed on a flat, level surface. If the splashback is not installed correctly, it may become loose and cause injury.


GB **IE**

CNA Trading U.K. Ltd
 Hillbrow House
 Hillbrow Road
 Esher
 Surrey
 KT10 9NW

cata 

BSB60/70/90 SB60/70/90
 CSB70/90

Splash-Back

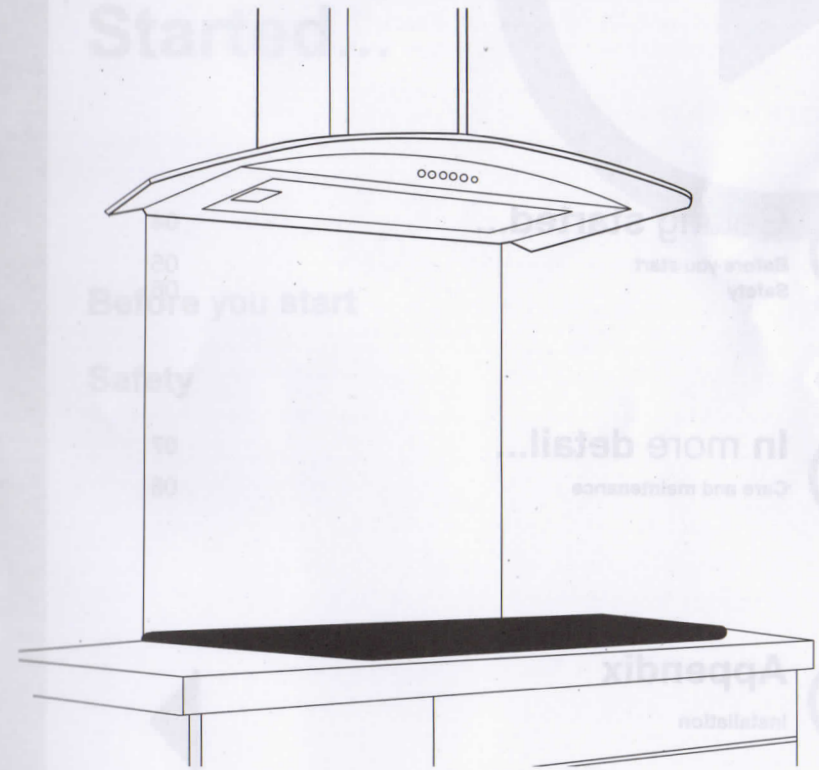

GB **IE**



Let's get started...



Getting started...

Before you start
Safety

04
05
06



In more detail...

Care and maintenance

07
08



Appendix

Installation

09

GB IE

GB IE

Getting started...

Getting Started...



Before you start

05


Safety

06

Before you start

- Check the pack and make sure that you have all parts listed.
- When you are ready to start, make sure that you have the right tools available, plenty of space and a clean dry and smooth area for installation.
- After unpacking the appliance please check that it is not damaged. If in doubt, do not use the appliance but contact Customer Services on 0844 800 1128 (UK), 01 4475261 (Ireland) and 01 56 48 02 60 (France)


You will need



Getting started...

Getting started...

- CAUTION:** Always ensure the product is securely installed before use.
- Self adhesive tape is a fixation support until the silicone sealant has set
- Domestic use only
- If this product contains glass, please take care when fitting or handling to prevent personal injury or damage
- The hob must not be used for 24 hours after the splashback has been installed
- Wait 24 hours before removing the protective film

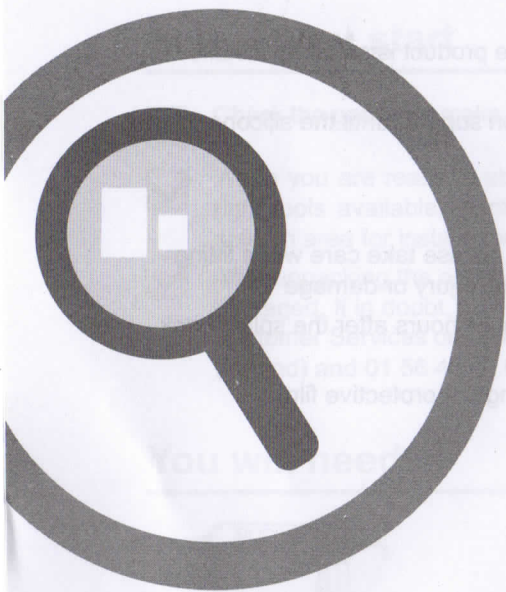

In more detail...

Care and maintenance

08

In more detail...

In more detail...


Care and maintenance

- Clean Stainless Steel using non-corrosive, liquid detergent or a special stainless steel cleaner and avoid the use of abrasive cleaning products.
- Clean glass with a damp cloth and mild soap. Dry with a soft clean cloth. Never use scourers, abrasives or chemical cleaners.


Appendix...

Installation



Appendix...

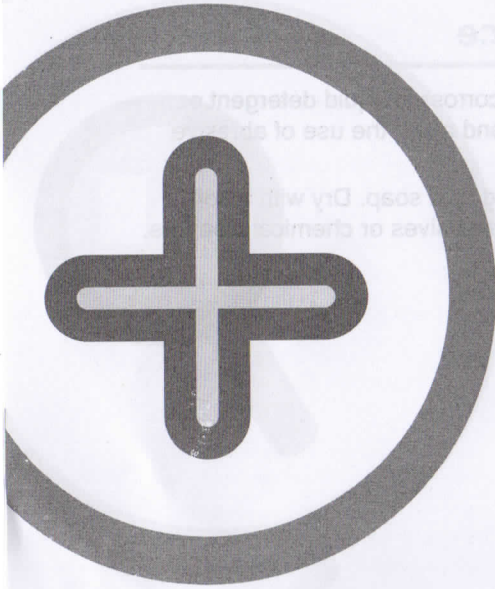

01

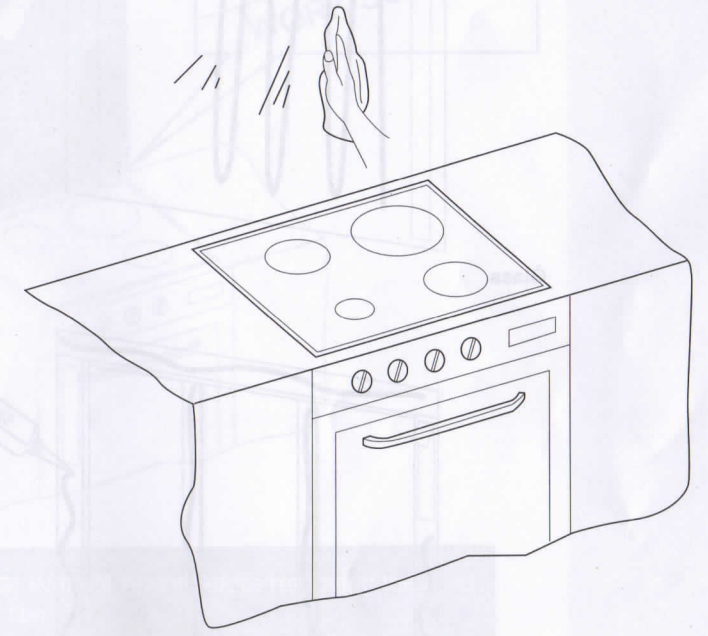

NOTE: Ensure walls are level and clean.

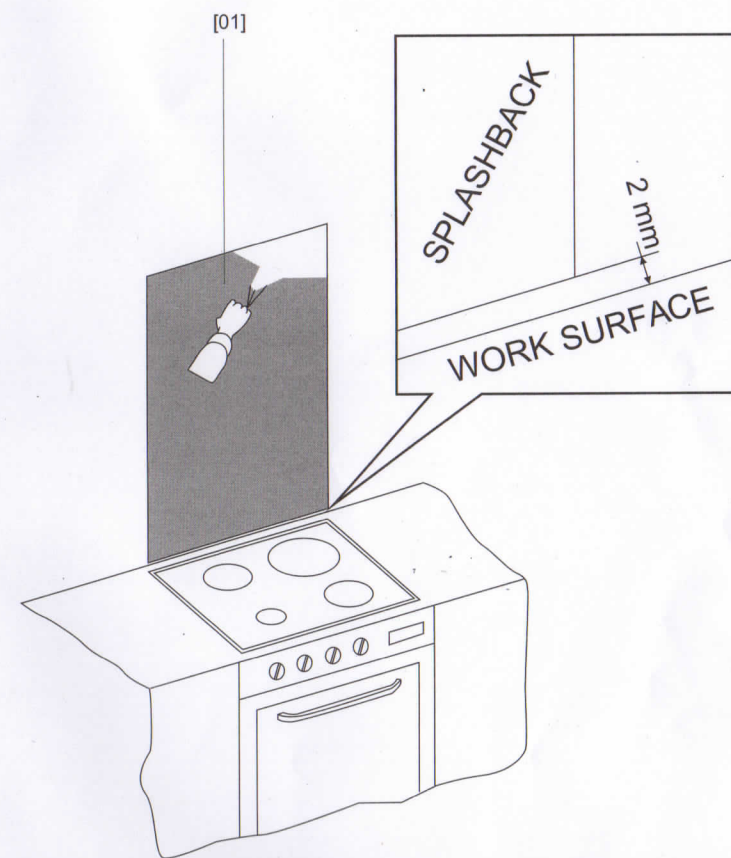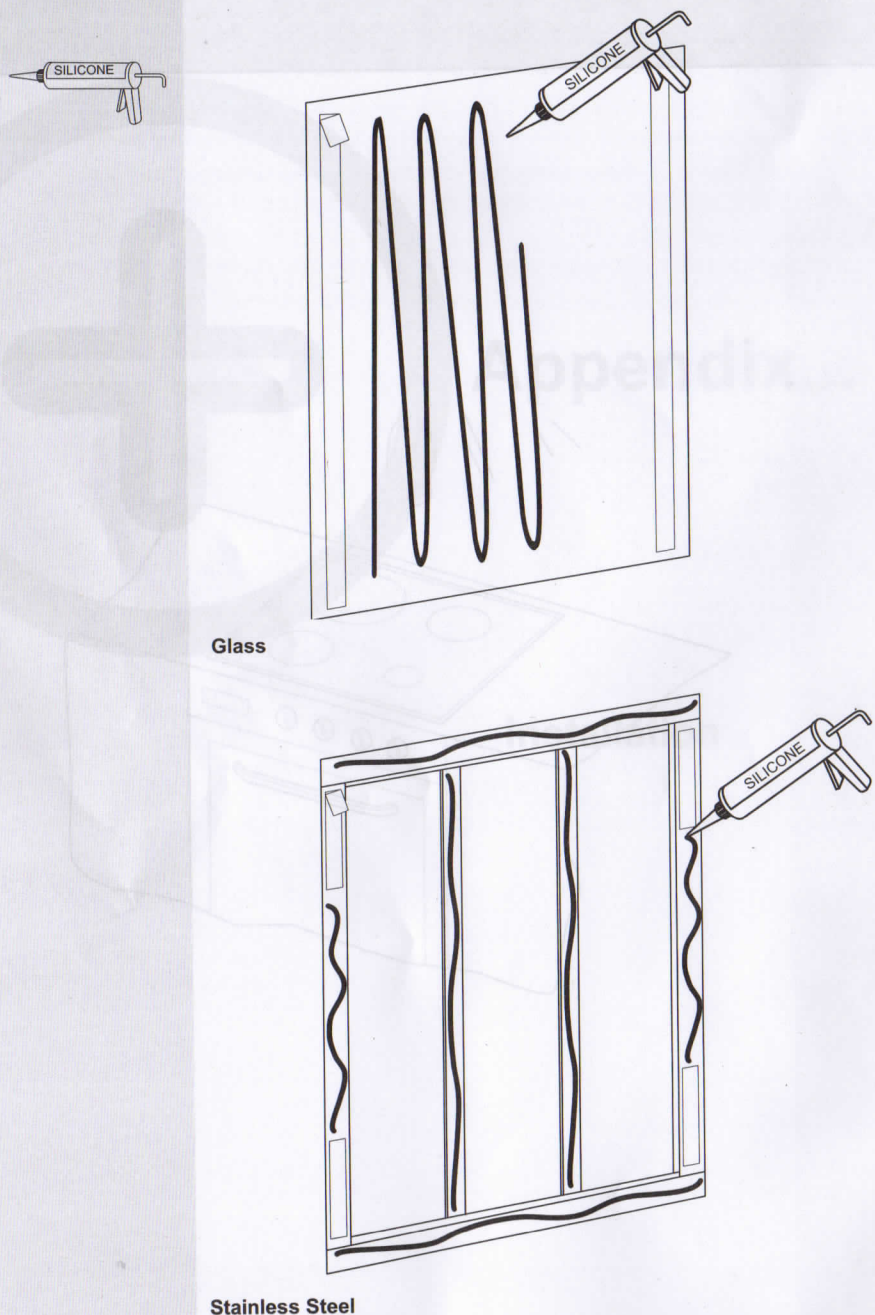

WARNING: Wait 24 hours before removing the protective film.

WARNING: The hob must not be used for 24 hours after the splashback has been installed.

Note for Glass splashbacks:
If installing the glass splash back, then a 2mm gap needs to be left all the way around, so it can expand without pressing against anything which will cause internal stresses.

Note for S/Steel splashbacks:
Seal around the Splash Back with silicone sealant.

NOTE: The double sided tape supports the splash back while the silicone adhesive sets.